

FOAM & ADHESIVE

DOT-39 NON-REFILLABLE CYLINDERS





STANDARD SPECIFICATIONS

MODEL	7.5 INCH	9.5 INC	н	12 INCH
HEIGHT (IN)	14.6	16.4		17.6
WATER CAPACITY (LBS)	15.8	29.7		49.6
DIAMETER (IN)	7.5	9.5		12
CYLINDER VOLUME (CU. IN.)	438	822		1,378
STANDARD SPECIFICATION				
SERVICE PRESSURE (PSIG)	260	260		260
TEST PRESSURE (PSIG)	325	325		325
OPTIONAL SPECIFICATION				
SERVICE PRESSURE (PSIG)	400	320	400	320
TEST PRESSURE (PSIG)	500	400	500	400

All dimensions are approximate.



Features

- Rounded edges for safe handling
- Comfort grip for improved handling
- Arched design for light weight, enhanced durability and increased strength
- Wide 3.2" opening for easy valve access and filling
- Robust steel dip tube for consistent liquid delivery

Stamps Of Authenticity

Guaranteed Quality. Guaranteed Worthington.





For more information, contact a Worthington Industries representative today.

200 OLD WILSON BRIDGE ROAD COLUMBUS, OHIO 43085 P: 614.438.3013 TOLL-FREE: 866.928.2657 CYLINDERS@WORTHINGTONINDUSTRIES.COM WORTHINGTONINDUSTRIES.COM




FOAM & ADHESIVE

DOT-39 NON-REFILLABLE CYLINDERS

35

28

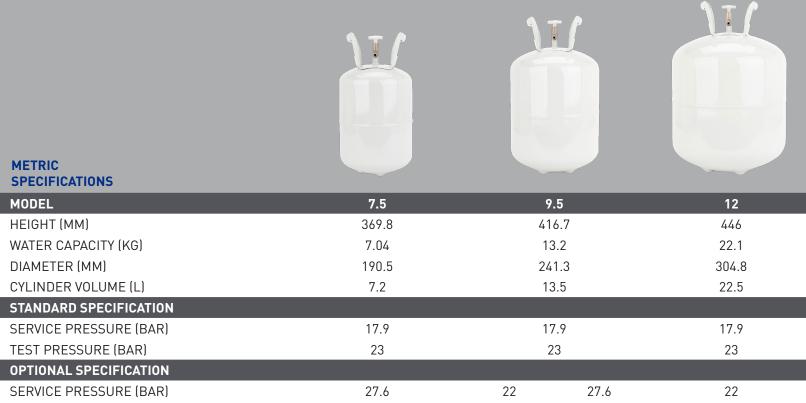

TEST PRESSURE (BAR)

All dimensions are approximate.



Features

Rounded edges for safe handling

- Comfort grip for improved handling
- Arched design for light weight, enhanced durability and increased strength •

35

Wide 3.2" opening for easy valve access and filling

Robust steel dip tube for consistent liquid delivery

Stamps Of Authenticity

Guaranteed Quality. Guaranteed Worthington.





Shoulder



For more information, contact a Worthington Industries representative today.

200 OLD WILSON BRIDGE ROAD COLUMBUS, OHIO 43085 P: 614.438.3013

TOLL-FREE: 866.928.2657 CYLINDERS@WORTHINGTONINDUSTRIES.COM WORTHINGTONINDUSTRIES.COM

28